


Through Wi-Fi


HDMI Extender over WiFi (1 to 1)

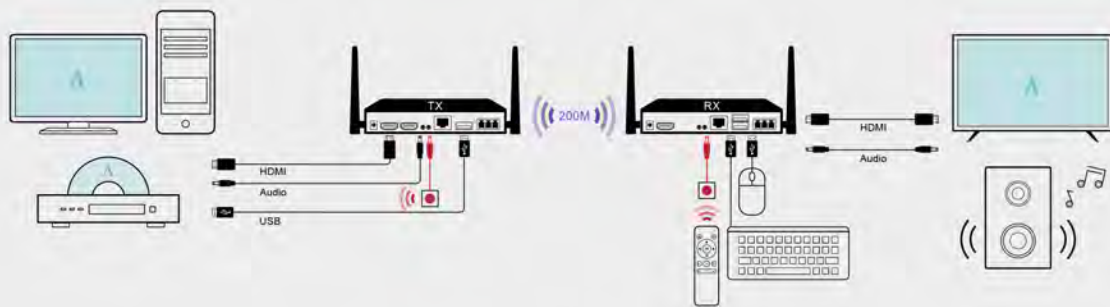

Through Wi-Fi


HDMI Splitter over WiFi (1 to N)



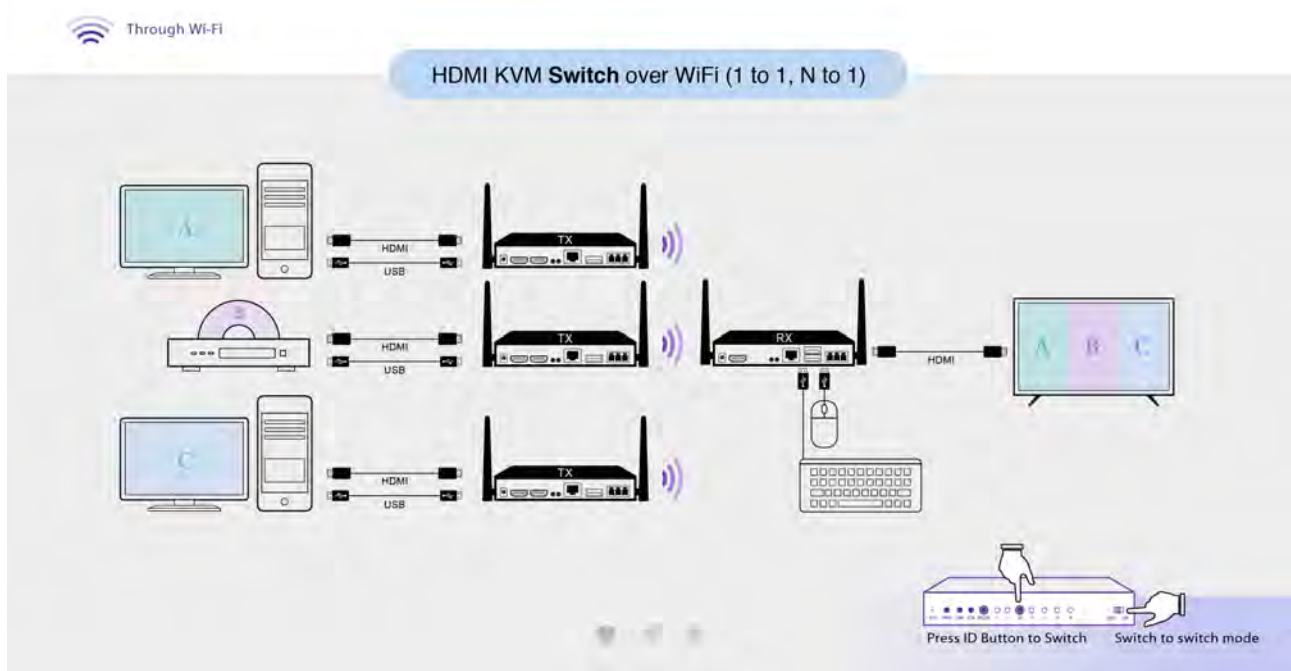


Switch/ Router configuration for EZCast ProAV


Enable Internet Group Management Protocol (IGMP) snooping service on your switch.

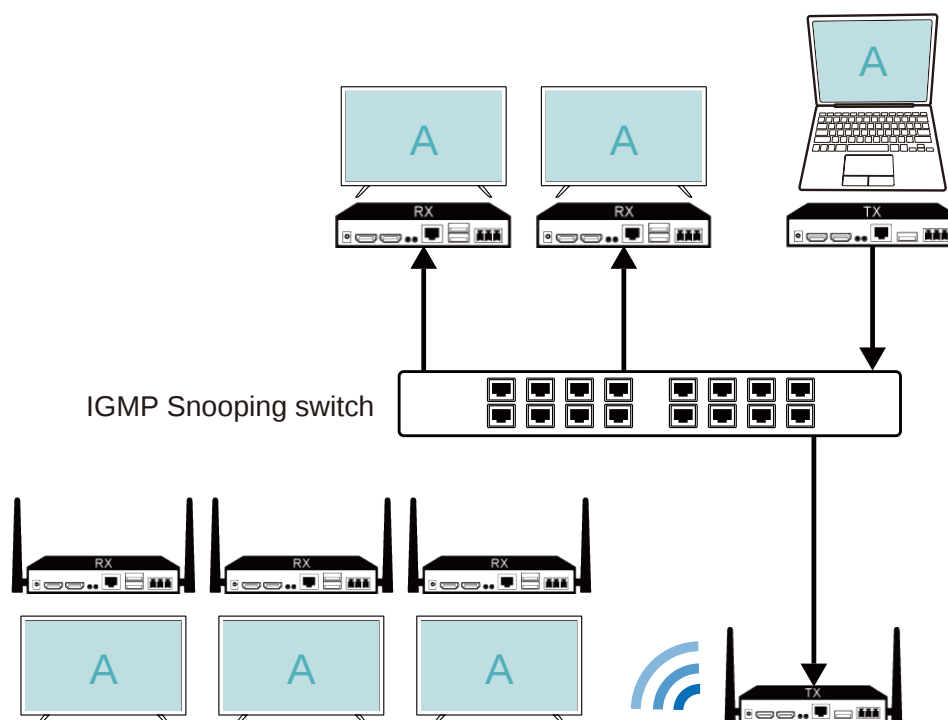

Set different VLAN ID of network ports connected to EZCast ProAV from your current devices.

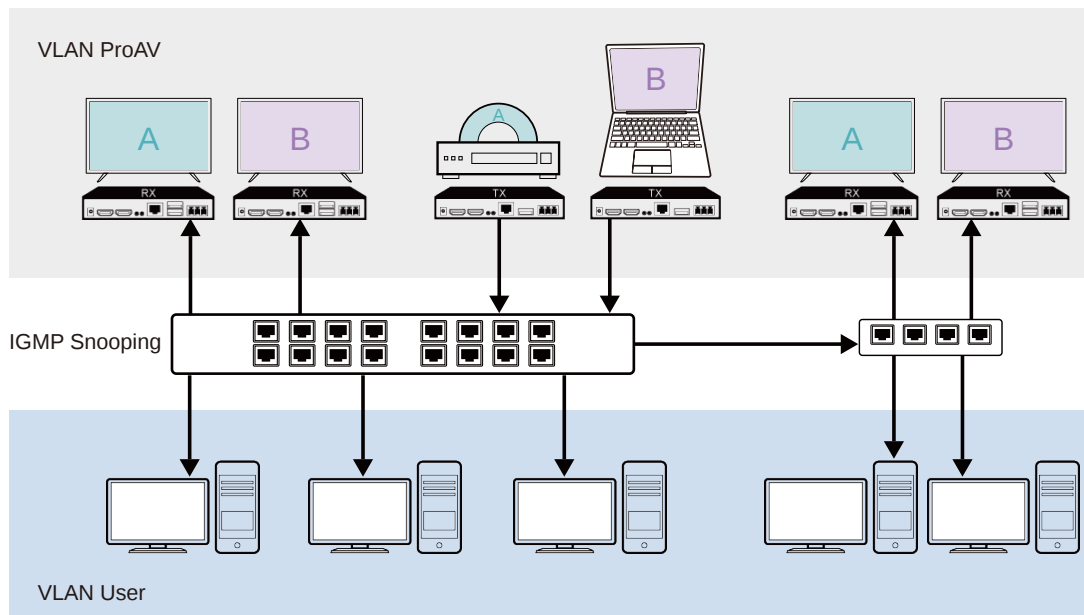

Establish a dependent network environment for EZCast ProAV to avoid the flooding.

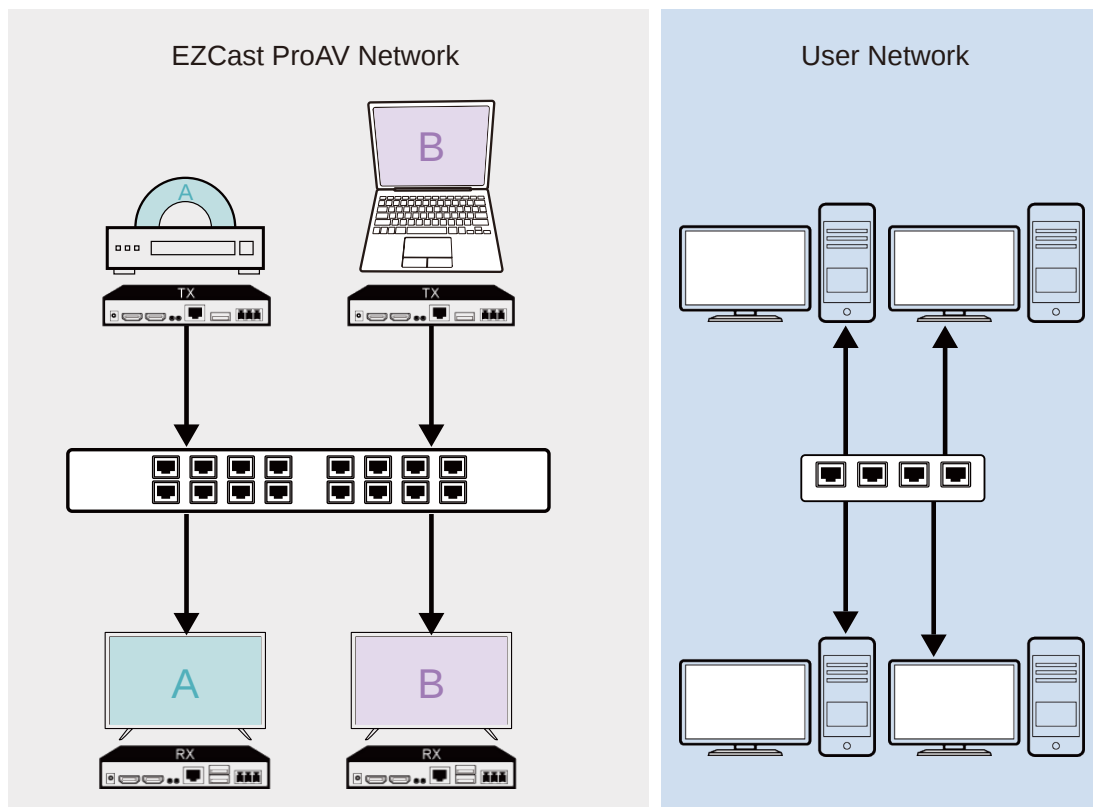

*** Troubleshooting guide:**

Unable to transmit data among EZCast ProAV: Please make sure to unblock the TCP/UDP port access in the firewall settings of your network.